



# Aussiemet

## AussieCast

### RC839

### Technical Chart 9KT

RC839 is red gold alloy for 9-14kt casting. Most suitable applications as below:

- ◆ Can be used in open system casting
- ◆ Can be used in close system casting
- ◆ Can be used in stone in place casting
- ◆ Offers high fluidity and bright oxidation-free castings

#### Physical Characterization Data

COLOR	Deep Pink
DENSITY [G/CM <sup>3</sup> ]	11.05
MELTING TEMPERATURE	975 °C
HARDNESS AS CAST	123 HV
HARDNESS AFTER AGE HARDNING	123 HV

#### Casting Parameter


ALLOYING TEMPERATURE RANGE	1020 °C – 1100 °C
CASTING TEMPERATURE RANGE	1000 °C – 1080 °C
FLASK TEMPERATURE RANGE	600 °C – 720 °C

**Trees Without Stones:-** Let the flask cool for 1-2 minutes then quench in water.

**Trees With Stones:-** Remove the flask immediately from the machine. Dip only the bottom part of the tree in cold water and keep under ventilation for 15-20 minutes. Quench in warm water.

## Investment Casting Instructions

Pre-Alloying is strongly recommended simply to ensure better homogeneity in castings as well as in hand made products. Also, for still better results, pre-alloying in an inert atmosphere is always preferred. The actual casting temperatures and flask temperatures shall be decided by the parameters like the section thickness of the items (thick, medium or thin), the overall size/bulk of the cast tree, the design intricacies etc. As a thumb rule, for thinner sections higher temperatures are selected and for thicker sections lower temperatures are preferred. At the same time, designs demanding higher form filling capabilities, higher than normal temperatures are an obvious choice.

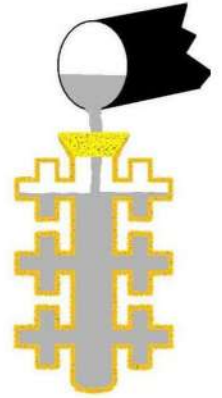

## Cleaning, Pickling and Cooling Instructions

After primary removal of the investment during quenching, submerge tree in a hot (80-100 °C) 50% phosphoric acid solution for 15-20 minutes. Rinse well with cool water to remove remaining investment powder and base metal oxides.



## Reusing Scrap Instructions

Before reuse of scraps clean the scrap in best possible manner with the ultrasonic and magnetic polishing machine and remove all the dirt, oil, and greases from the metals. The scrap use percentage is not more than 50%.



### Notes:-

The above directions are only indicative. Strong variations to the above data are possible, depending on personal experience. Please, do not hesitate to contact us for further information.



# Aussiemet

Website: [www.aussiemet.com.au](http://www.aussiemet.com.au),

Email: [info@aussiemet.com.au](mailto:info@aussiemet.com.au), [sales@aussiemet.com.au](mailto:sales@aussiemet.com.au),

89 SOMERSBY CIRCUIT, ACACIA GARDENS, NSW 2763, AUSTRALIA